


LADY PACK AUTO 30/L - AUTO 40/L




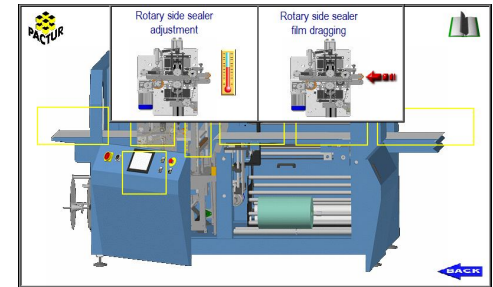
Automatic continuous
side seal machines

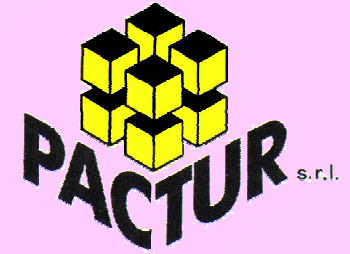

High performances with medium size products
No limits in length with long products

AUTO 30/L - AUTO 40/L

-  Continuous side sealer - Transversal sealing bar available with pneumatic or servo control
-  20 memories and automatic size change over
-  possible connection to shrink tunnel with teflon net or metal net or coated rollers
-  possible connection to infeed belt or infeed / collating systems



Example of the new touch screen

TECHNICAL DATA

	AUTO 30/L	AUTO 40/L
Total machine width	1.225 mm	1.570 mm
Total machine length	2.240 mm	2.343 mm
Total machine height	1.475 mm	1.475 mm
Transversal sealer width	300 mm	450 mm
Max product height	150 mm	150 mm <i>(possible extension on request)</i>
Power supply	220 V single phase	
Power consumption	2 ÷ 3 Kw	
Compressed air	6 ÷ 8 bar	
Pneumatic consumption	227 NL / min	295 NL / min
Control pannel	PLC Mitsubishi with new, user friendly touch screen	
Adjustments	automatic with 20 memory pages and automatic size change over	
Conveyor speed	8 ÷ 28 mt / min	
Film	PO and PE centre folded	
Max film roll width	450 mm Ø 350 mm	700 mm Ø 350 mm